


Viti a testa cilindrica con esagono incassato a norma

DIN 912 / DIN EN ISO 4762

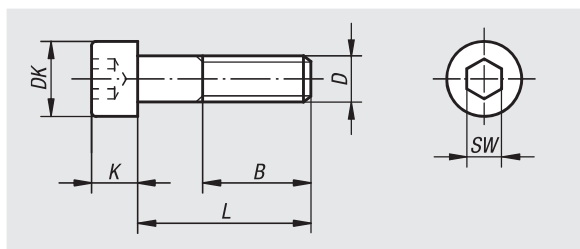

Materiale:


Acciaio.

Versione:

Acciaio classe di resistenza 12.9, nero.

Esempio di ordine d'acquisto:

nIm 07160-206X40 (indicare la lunghezza L)



N. ordine	Classe di resistenza	D	L	B	DK	K	SW
07160-206X	12.9	M6	18/20/25/30/35/40/45/50/55/60/65/70/80/90/100	24	10	6	5
07160-208X	12.9	M8	20/25/30/35/40/45/50/55/60/65/70/80/90/100/120	28	13	8	6
07160-210X	12.9	M10	30/35/40/45/50/55/60/65/70/75/80/90/100/110/120/130/140	32	16	10	8
07160-212X	12.9	M12	30/35/40/45/50/55/60/65/70/75/80/90/100/110/120/130/140	36	18	12	10
07160-216X	12.9	M16	35/40/45/50/55/60/65/70/75/80/90/100/110/120/130/140/150/160/170/180/200	44	24	16	14
07160-218X	12.9	M18	35/40/45/50/55/60/65/70/75/80/90/100/110/120/130/140/150/160/170/180/200	48	27	18	14
07160-220X	12.9	M20	40/45/50/55/60/65/70/75/80/90/100/110/120/130/140/150/160/170/180/200	52	30	20	17